

Design of a Dynamic Simulation Platform for Verifying Unloading Automation Algorithms in Grab Type Ship Unloader

Ga Eun Jung ¹⁾, Jae In Lee ¹⁾, Seok Ju Lee ^{1)} and Chang Uk Kim ³⁾*

¹⁾Dept. of Electrical Engineering, Changwon National University, Changwon 51140, Republic of Korea

²⁾Industry-University Cooperation Foundation, Changwon National University, Changwon 51140, Republic of Korea

³⁾R&D Center, S-Material Handling Co., Ltd., Changwon 51395, Republic of Korea

Abstract. The transformation of seaports into smart ports has increased interest in the automation of Grab-Type Ship Unloaders (GTSU), which are essential for unloading bulk materials like coal and iron ore. Automated GTSU systems enhance operational safety, reduce energy consumption, and lower carbon emissions, offering significant advantages over conventional systems. This study presents the development of a dynamic simulation platform for validating GTSU unloading automation algorithms designed for smart ports. The crane system within the dynamic simulation platform is implemented in Modelica as a continuous-time system. The input of the crane system model is the speed of each driving part, and the output is the position of each driving part. Simulation results were verified by comparing the actual and simulated operating positions. The errors from the actual displacement of the trolley and hoist were 0.35 m and 1.10 m, respectively. The proposed simulation platform demonstrates potential for accelerating the development and deployment of fully automated GTSU systems, contributing to the realization of smart port operations.

Keywords; dynamics; grab-type ship unloader; Modelica; simulation-based validation; smart port

Cite this paper as : Ga Eun Jung, Jae In Lee, Seok Ju Lee and Chang Uk Kim (2025) "Design of a Dynamic Simulation Platform for Verifying Unloading Automation Algorithms in Grab Type Ship Unloader", Journal of Industrial Information Technology and Application, Vol. 9. No. 1, pp.1051 - 1058

1. Introduction

Seaports are being transformed into 'smart ports' equipped with unmanned automation technology [1]. Along with seaports automation, there is growing interest in the automation of Grab-Type Ship Unloader (GTSU) that unloads coal and iron ore from bulk carriers [2]. Automated GTSU systems ensure safety while offering financial benefits through energy efficiency and reduced carbon emissions, setting them apart from conventional systems. The GTSU automation aims to replace human tasks with sophisticated sensors and control systems [3].

As one of the GTSU automation functions in smart ports, manual operation methods must be replaced by automated algorithms.

This paper presents the design of a dynamic simulation platform for verifying GTSU unloading automation algorithms. To simulate scenarios similar to real-world environments, a dynamic model reflecting the behavioral characteristics of GTSU was developed. In addition, a 3D model reflecting the actual specifications of the GTSU equipment was applied so that the unloading operation can be intuitively visualized.

When the speed data of each driving unit is input into the dynamic simulation platform, the behavior simulation is performed by converting it into position data through integration over time. The dynamic simulation results are verified by calculating the error distance through comparison with the actual movement displacement.

The errors from the actual displacement of the trolley and hoist were 0.35 m and 1.10 m, respectively. The maximum angle of the grab was simulated to be 15.2 degrees, which requires the application of anti-sway control in the future. The proposed GTSU dynamic simulation platform will be effectively utilized to implement a fully automated unloading system.

2. Mathematical Model of the GTSU

The GTSU consists of a trolley, hoist, and grab, and can be expressed in a simplified form as a crane system [6]. The configuration of the crane system is shown in Figure 1. It is expressed as a cart and a pendulum, and the crane system can be described as a free body diagram.

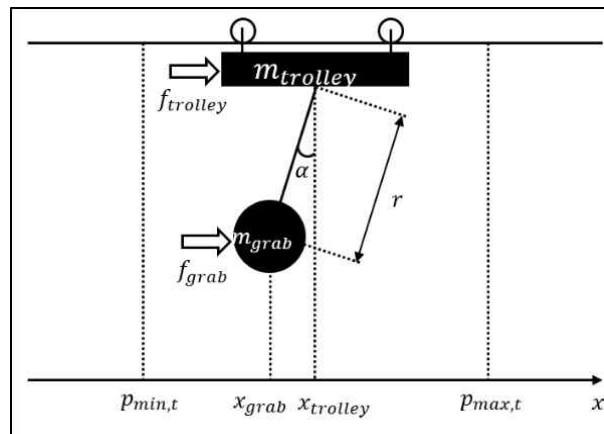


Fig 1. Configuration of the crane system

When applying the cart-pendulum model to the GTSU, the cart is replaced by a trolley and the pendulum is replaced by a grab. The trolley is driven by a motor force f_c , and the pendulum is subjected to a disturbance f_d . The trolley is position controlled to reach the desired position specified by the user. The variables and parameters of the cart pendulum free body diagram are shown in Tables 1 and 2 [4].

TABLE I. MODEL VARIABLES

<i>Symbol</i>	<i>Description</i>	<i>Unit</i>
θ	Angle of the cable	rad
f_{trolley}	Input force of the trolley	N
f_{grab}	Grab disturbances	N
x_{trolley}	Position of the trolley	m
x_{grab}	Position of the grab	m

TABLE II. MODEL PARAMETERS

<i>Symbol</i>	<i>Description</i>	<i>Unit</i>
d_{trolley}	Friction coefficient of the trolley	0.5 kg/s
$d_{\text{brake trolley}}$	Friction coefficient of the trolley with activated brake	10^5 kg/s
d_{grab}	Friction coefficient of the grab	0.01 kg/s
g	Gravity	9.81 m/s ²
m_{trolley}	Mass of the trolley	58,000 kg
m_{grab}	Mass of the grab	27,000 kg
$p_{\text{max.t}}$	Maximum position of the trolley	42 m
$p_{\text{min.t}}$	Minimum position of the trolley	0 m
l	Length of the wire rope	5 m

The crane system is a nonlinear model, and its mathematical formula is expressed as follows [5]:

$$\begin{aligned}
 \ddot{x}_{\text{trolley}}(m_{\text{trolley}} + m_{\text{grab}}\theta) &= -d_{\text{trolley}}\dot{x}_{\text{trolley}} + f_{\text{trolley}} + f_{\text{grab}}\theta + m_{\text{grab}}\sin\theta \\
 &\quad [l\dot{\theta}^2 + g\cos\theta] - d_{\text{grab}}\dot{x}_{\text{trolley}}\theta \quad (1) \\
 l^2\ddot{\theta}[m_{\text{trolley}} + m_{\text{grab}}\theta] &= \left[f_{\text{grab}} \frac{m_{\text{trolley}}}{m_{\text{grab}}} - f_{\text{trolley}} + d_{\text{trolley}}\dot{x}_{\text{trolley}} \right] l\cos\theta - \\
 &\quad [g(m_{\text{trolley}} + m_{\text{grab}}) + m_{\text{grab}}l\dot{\theta}^2\cos\theta]\sin\theta - d_{\text{grab}}\left[\frac{m_{\text{trolley}}}{m_{\text{grab}}} \right. \\
 &\quad \left. (\dot{x}_{\text{trolley}}l\cos\theta + l^2\dot{\theta}) + l^2\dot{\theta}\theta \right] \quad (2) \\
 x_{\text{grab}} &= x_{\text{trolley}} + l\sin\theta \quad (3)
 \end{aligned}$$

3. Dynamic Simulation Platform

A dynamic simulation platform is implemented to verify the automated operation algorithm of the GTSU. Input and output of the dynamic simulation platform are the operation speed of each drive unit and the operation position of the GTSU. The operation positions which are the output of the dynamic simulation platform are compared with the actual operation positions to verify the automation algorithm.

In this study, CATIA 3DEXPERIENCE software was used to design the dynamic simulation platform. The dynamic simulation platform can be divided into two parts, including dynamic equations based on the motion equations and a 3D model that visualizes dynamic operation. The dynamic equation is applied through the Modelica component, where the dynamic equation code is written based on the equation of motion.

Figure 2 shows the control block diagram based on the motion equations of the main driving units, trolley, hoist, and grab. In the trolley part, the operation speed is converted into force and input, while in the hoist and grab parts, the operation speed of the drive units is directly input. The speed of each drive is the PLC data converted from RPM unit speed data for equipment control. Table 3 shows the maximum speed of each drive part.

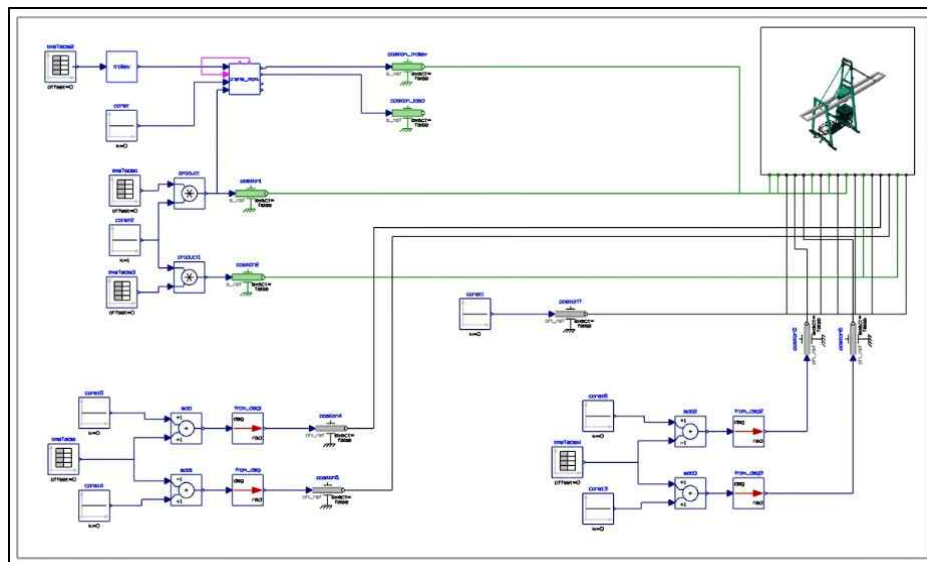


Fig 2. Dynamics-based GTSU drive block diagram

TABLE III. MAXIMUM SPEED OF THE MAIN DRIVE UNIT

<i>Motion</i>	<i>Speed</i>	<i>Unit</i>
Hoist/Lower	152 / 183	m/m in
Open/Close	183 / 152	m/m in
Trolley traverse	190	m/m in

4. Simulation Results

The GTSU dynamic simulation was performed by inputting the speed of each driving unit derived through the automatic control algorithm. The actual displacements of movement for the trolley and the hoist are 42 m and 30 m, respectively. The speed data for each drive part are shown in Fig. 3. The system is simulated for 73 s. The results are shown in Fig. 4. The results include position of each driving part and grab angle data according to the input speed. As a result of the simulation, the trolley moved 41.65 m and returned, and the hoist moved 28.90 m and returned. The errors from the actual displacement of the trolley and hoist were 0.35 m and 1.10 m, respectively.

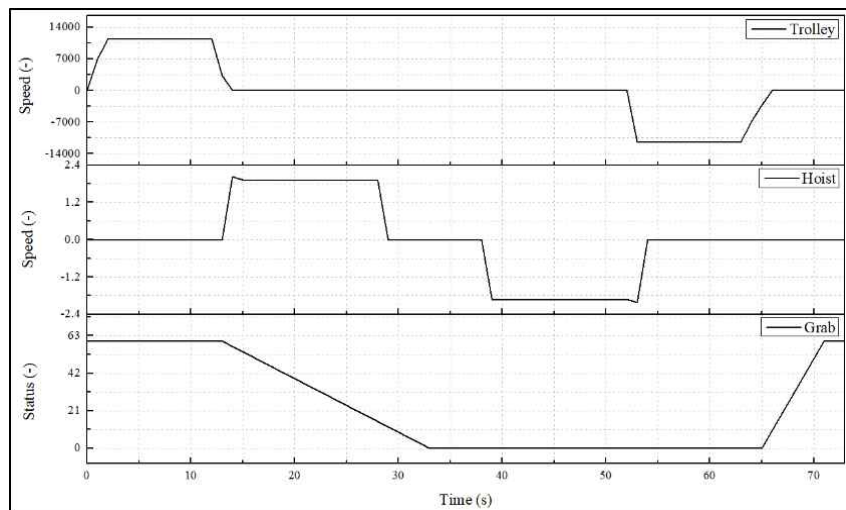


Fig 3. GTSU speed data for each drive part (simulation input)

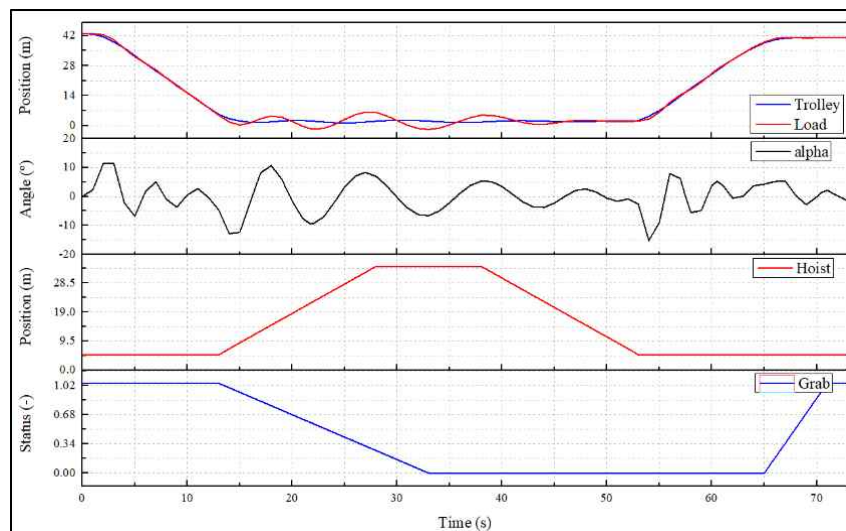


Fig 4. Simulation results using the dynamic simulation platform

When analyzing the angle of the grab, the maximum angle was simulated to be 15.2 degrees. The sway angle can affect work efficiency and safety. In the future, we plan to secure the safety of automated control through anti-sway control.

5. Conclusion

This paper presents the development of a dynamic simulation platform for validating GTSU unloading automation algorithms. The crane system within the dynamic simulation platform is implemented in Modelica as a continuous-time system. The dynamic simulation platform designed based on the GTSU motion equations receives predicted speed data and simulates the moving positions. Simulation results were verified by comparing the actual and simulated operating positions. The errors from the actual displacement of the trolley and hoist were 0.35 m and 1.10 m, respectively. The dynamic simulation platform is expected to serve as a critical tool for advancing smart port operations, bridging the gap between algorithm design and real-world implementation.

Acknowledgment

This work was supported by the Technology Development Program (00140859) funded by the Ministry of SMEs and Startups(MSS, Korea).

References

- [1] Molavi, A., Lim, G. J., and Race, B, "A framework for building a smart port and smart port index," *International Journal of Sustainable Transportation*, vol. 14, pp. 686–700, 2019.
- [2] iSAM, Autonomous Grab Ship Unloaders for Bulk Materials, Available online: <https://www.isam-ag.com/our-solutions/%20automation-of-grab-ship-unloaders-for-bulk-materials/> (accessed on 26 Jan 2025).
- [3] C Heyer, "Human-Robot Interaction and Future Industrial Robotics Applications," *IEEE/RSJ International Conference on Intelligent Robots and Systems*, pp. 4749–4754, 2010.
- [4] Victorino Sanz, François E. Cellier, Alfonso Urquia and Sebastian Dormido, "Modeling of the ARGESIM "Crane and Embedded Controller" System using the DEVSLib Modelica library," *IFAC Proceedings Volumes*, Vol. 42, pp. 86–91, 2009.
- [5] Schiftner, A. "A Modelica approach to ARGESIM comparison 'Crane and Embedded Control' (c13 rev.) using the simulator Dymola," *Simulation News Europe*, Vol. 16, 2006.
- [6] Yong Zhou, Xinyuan Zhang, Zhenzhen Yu, Dingena Schott and G. Lodewijks, "An improved zero vibration method and parameter sensitivity analysis for the swing control of bridge-type grab ship unloader," *Proceedings of the Institution of Mechanical Engineers, Part C: Journal of Mechanical Engineering Science*. 2015.

COPYRIGHT TRANSFER FORM

Title of the Journal: International Society for Information Technology and Application

Title of Work: Design of a Dynamic Simulation Platform for Verifying Unloading Automation Algorithms in Grab Type Ship Unloader

Author(s) name(s): Ga-Eun Jung, Jae-In Lee, Seok-Ju Lee, Chang-Uk Kim

Corresponding Author's name, affiliation, Country and e-mail: Seok-Ju Lee, Changwon National University, Republic of Korea, capta.paper@gmail.com

The copyright to the Contribution identified above is transferred to International Society for Information Technology and Application (hereinafter called ISIITA). The copyright transfer covers the sole right to print, publish, distribute and sell throughout the world the said Contribution and parts thereof, including all revisions or versions and future editions, in all forms and media of expression – such as in its electronic form (offline, online) – now known or developed in the future, as well as to translate, print, publish, distribute and sell the Contribution in any foreign languages and throughout the world.

I, the undersigned, declare that the article is original, and that I represent the authors of this article in the copyright release matters. If this work has been done as work-for-hire, I have obtained all necessary clearances to execute a copyright release.

I hereby irrevocably transfer exclusive copyright for this material to ISIITA. I give ISIITA permission or reproduce the work in any media format such as, but not limited to, print, digital, or electronic. I give ISIITA permission to distribute the materials without restriction to any institutions or individuals. I give ISIITA permission to submit the work for inclusion in article repositories as ISIITA sees fit.


I, the undersigned, declare that to the best of my knowledge, the article is does not contain libelous or otherwise unlawful contents or invading the right of privacy or infringing on a proprietary right.

Following the copyright release, any circulated version of the article must bear the copyright notice and any header and footer information that ISIITA applies to the published article. ISIITA grants royalty-free permission to the authors to disseminate the work, under the above provisions, for any academic, commercial, or industrial use. ISIITA grants royalty-free permission to any individuals or institutions to make the article available electronically, online, or in print. ISIITA acknowledges that rights to any algorithm, process, procedure, apparatus, or articles of manufacture remain with the authors and their employers.

I, the undersigned, understand that ISIITA will not be liable, in contract, tort (including, without limitation, negligence), pre-contract or other representations (other than fraudulent misrepresentations) or otherwise in connection with the publication of my work.

Exception to the above is made for work-for-hire performed while employed by the government. In that case, copyright to the material remains with the said government. The rightful owners (authors and government entity) grant unlimited and unrestricted permission to ISIITA, ISIITA's contractors, and ISIITA's partners to further distribute the work.

The Corresponding Author signs for and accepts responsibility for releasing this material on behalf of any and all Co-Authors.

Signature(s) of Author(s) :  Date : 2024.01.17

AUTHOR/COMPANY RIGHTS:

If you are employed and you prepared your paper as part of your job, the rights to your work rest initially with your employer. In that case, when you sign the copyright transfer form, we assume you are authorized to do so by your employer and that your employer has consented to all the terms and conditions of this form. If not, it should be signed by someone so authorized.

PLEASE DIRECT ALL QUESTIONS ABOUT ISIITA COPYRIGHT POLICY OR THIS FORM TO:
Conference secretarial / International Symposium on Innovation in Information, E-mail:
isiita.paper@gmail.com Office