

# 10 Assessment of Pricing-Based Demand Response Programs and Their Impact on Demand-Side Management

*Mohamed A. Abdellah<sup>1\*</sup>, Mohamed Abd Elazim Nayel<sup>2\*</sup>, Islam M. Alkabbany<sup>3\*</sup>, Hany Selim<sup>4\*</sup>*

<sup>\*</sup>) Dept. of Electrical Engineering, Assiut University, Assiut, Egypt, 71511.

<sup>1)</sup> [mohmedahmed01097@gmail.com](mailto:mohmedahmed01097@gmail.com) <sup>2)</sup> [mohamed.nail@eng.au.edu.eg](mailto:mohamed.nail@eng.au.edu.eg)

<sup>3)</sup> [islam.elkabani@eng.au.edu.eg](mailto:islam.elkabani@eng.au.edu.eg) <sup>4)</sup> [hselim@aun.edu.eg](mailto:hselim@aun.edu.eg)

**Abstract.** Pricing-based demand response programs (DRPs) play a crucial role in Demand-Side Management (DSM) by enhancing energy efficiency, reducing peak demand, and facilitating renewable energy integration. This study evaluates various pricing models, including Flat-Rate Pricing, Block Tariff Systems, Time-of-Use (TOU) Pricing, Seasonal Pricing, Real-Time Pricing (RTP), Critical Peak Pricing (CPP), and Renewable Generation-Based Dynamic Pricing (RGDP). The study includes an analysis of these models concerning DSM results like energy efficiency, peak load management, consumer behavior, and environmental sustainability. TOU and CPP stood out in efforts to curb peak demand, while RTP and RGDP offer optimal load management but require advanced infrastructure. These models have much promise in integrating consumption with the availability of renewable energy. Some challenges like social awareness and regulatory frameworks, mentioned in discussions, might become factors against the mass adoption of these pricing models.

**Keywords;** Demand-Side Management, Pricing-Based Demand Response, Energy Efficiency, Renewable Integration, Sustainability.

---

Cite this paper as : Mohamed A. Abdellah, Mohamed Abd Elazim Nayel, Islam M. Alkabbany and Hany Selim (2025) "Assessment of Pricing-Based Demand Response Programs and Their Impact on Demand-Side Management", Journal of Industrial Information Technology and Application, Vol. 9. No. 1, pp. 1059 - 1069

---

## 1. Introduction

Modern energy systems face mounting challenges due to increasing demand, the variability of renewable energy sources, and the imperative for sustainability [1]. Demand-Side Management (DSM) provides a strategic answer to these issues by modifying the patterns of energy consumption to enhance grid efficiency, minimize greenhouse gas emissions, and facilitate the integration of renewable energy sources [2]. DSM cuts back the new power-generating need, especially from fossil fuels, that are necessary when peaks reduce loads and energy gains efficiency and greatly promotes the decarbonization agenda. According to the World Resource Institute, 61.4% of global greenhouse gas (GHG) emissions are from energy-related activities [3, 4].

Furthermore, it accounts for aligning energy use with those periods of high renewable generation to stabilize the energy system while mitigating environmental degradation.

Central to DSM are Demand Response Programs (DRPs) [5], which encourage consumers to adjust their energy use through direct controls and pricing incentives that aim to add flexibility and increase the reliability of the grid. [6] [7] A review of the literature indicated that DSM can be classified into two types (as shown in Figure 1):

- Energy efficiency emphasizes persuading consumers to use efficient products as a means of reduced demand. [8, 9], [10].
- demand response (DR) provides a platform for end-users to modify their energy consumption patterns in response to a price change of electricity over a period, thereby reducing the overall peak of the system. [11, 9].

DR Programs are typically categorized according to three criteria: the control mechanism employed (centralized or distributed), the type of incentive offered (Market-based, incentive-based or pricing-based), and the decision variable applied (task scheduling or energy management) [12].

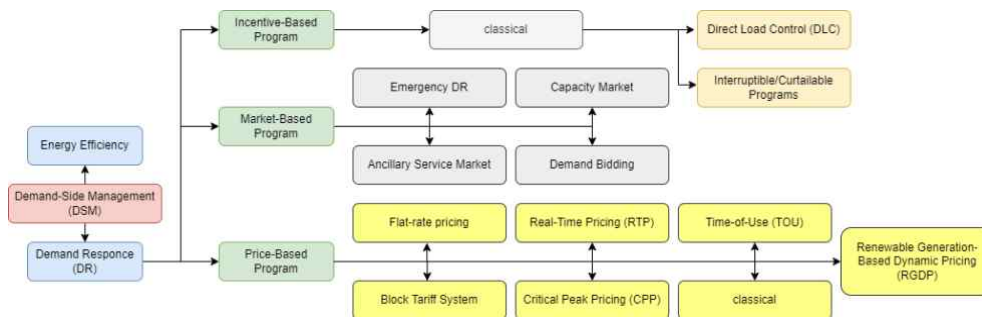


Figure 1. Classification of Demand-Side Management

Demand Response Programs (DRPs) can be divided into incentive-based and price-based programs [6]. In the first case, **incentive-based program**, classical program customers receive bill credit or discount rates for participating in the programs while **market-based** customers receive a reward for reducing their load consumption. **price-based programs** are utilized to flatten the demand curve by providing high prices during peak periods and lower prices during off-peak period [6].

Pricing-Based Demand Response Programs (DRPs) [5, 13] are primarily meant to inspire behavioral changes among consumers through pricing models. These programs are aimed at load shifting, reducing peak demand, and improving energy efficiency through providing financial incentives or disincentives. Pricing-based DRPs present his economic attitudes for energy use through temporal or volumetric changes in electricity tariffs. Pricing includes but is not limited to flat-rate pricing, block tariffs, time-of-use pricing, real-time pricing, seasonal pricing, critical peak

pricing, and RGDP. Each model possesses features and applications that vary and cater to different energy system requirements and consumer context.

This paper aims to evaluate the impact of various pricing models on DSM outcome. It compares these models for their applicability for developed and developing countries, highlighting specific challenges and benefits they provide in different contexts. The study also provides an opportunity to optimize these pricing models to improve grid management, ensure consumer engagement, and guarantee sustainability.

## 2. Literature Review

the existing literature presents demand response programs based on prices enabling modern financeable energy systems and achieving sustainability goals. It has been established that these programs can either promote orderly consumer demand responses, reduce peak demand, or involve renewable energy sources, etc. However, the models are successful based on the model of pricing specified and the circumstances of application. [14].

**Flat-rate pricing** is easy to execute and simple to understand but does not generally encourage behavioral changes. It is mostly used in countries where the metering infrastructure is limited, such as in developing nations. In direct contrast, for each incremental block of electricity consumed, a block tariff system will progressively increase the rate charged, which may be able to encourage conservation among its higher users. On the contrary, charges on emissions for larger households or businesses have come under scrutiny for being disproportionately punitive.

**Time-of-Use (TOU) pricing** divides the day into peak and off-peak periods. Its feature is giving lower rates during the off-peak period to encourage consumers to shift loads. [15] Relevant studies undertaken in countries like the U.S. and the UK have shown that TOU programs work on peak demand and renewable energy integration. However, the infrastructure for advanced metering and consumer awareness is rather limited in regions that are underdeveloped; hence they face notable challenges.

**Real-Time Pricing (RTP)** synchronizes electricity rates with real-time market conditions and offers dynamic benefits for consumers for them to alter usage. This seems to work well in markets with sophisticated metering and communication systems, such as the U.S., but it is costly to implement and thus less feasible in a resource-poor region.

Correspondingly, **Critical Peak Pricing (CPP)** offers multiple strong incentives to reduce consumption by imposing much higher rates during critical demand periods. However, a well-instituted communication mechanism must be present for it not to drive consumers abroad.

**Renewable Generation-Based Dynamic Pricing (RGDP)** links electric prices to renewables availability, boosting consumption in periods with plenty of renewable

output. The pumping of renewable energy in the grid is thus favorable with the use of this pricing structure requiring forecasting with the right accuracy and a very flexible grid.

There are three main categories of implementation challenges based on which [16] includes limited availability of advanced metering and communication infrastructure, low consumer awareness, and inconsistent regulatory frameworks. Pricing-based demand response programs come with their multiple challenges, such as reduced greenhouse gas emissions, renewable energy integration, and aid in the improvement of grid reliability.

Some literature is pointing to addressing said challenges as a way through which pricing-based DR programs may become effective in dealing with the assessed issues across diverse contexts.

As shown in [Table I], Despite these challenges, though, Pricing-Based DRPs do provide considerable benefits. They reduce peak load, as demonstrated by TOU and CPP programs. These models also allow the correlation between energy consumption and renewable generation, mainly through RGDP and TOU pricing. Consumers enjoy cost savings, while the utilities are spared from additional power-generation capacity expenses. Further, these programs help the environment by reducing greenhouse emissions due to lesser dependence on fossil fuels.

The study points out that Pricing-Based DRPs are critical to establish efficient, sustainable energy systems. When utilized to address the challenges to their implementation, such models would be optimized for broader applicability and for having greater impact across different energy contexts. [17].

Table I. CHALLENGES AND BENEFITS OF PRICING-BASED DEMAND RESPONSE PROGRAMS

Category	Challenges	Benefits
<b>Infrastructure</b>	Limited advanced metering and communication systems in developing regions.	Facilitates precise billing and real-time consumer engagement.
<b>Economic Constraints</b>	High implementation costs; subsidized tariffs reducing economic appeal for utilities.	Offers potential cost savings for utilities by reducing peak demand and avoiding extra capacity.
<b>Consumer Awareness</b>	Resistance to behavioral changes; low understanding of pricing models.	Enhance energy efficiency and reduce costs for informed consumers.
<b>Environmental Impact</b>	Risk of consumer dissatisfaction if programs are not well-designed or communicated.	Contributes to lower greenhouse gas emissions and supports renewable energy adoption.
<b>Regulatory Frameworks</b>	Inconsistent policies and lack of supportive regulations in some regions.	Creates opportunities for innovative energy management solutions.

### 3. Methodology

The study provides a structured approach to analyze the effectiveness of price models in Demand-Side Management (DSM). Its approach consists of analyzing seven different pricing models: Flat Rate Pricing, Block Tariff System, Time-of-Use (TOU) Pricing, Seasonal Pricing, Real-Time Pricing (RTP), Critical Peak Pricing (CPP), and Renewable Generation Based Dynamic Pricing (RGDP). So, these models are analyzed to gauge the improvement of overall energy efficiency, to control peak demand, and to encourage consumer behaviour in accordance with grid needs.

In order to capture the entirety of the analysis, the study goes on to identify various critical elements of the pricing models: the infrastructure requirement, the influence on consumer behaviour, and the capacity of each model to scale across different energy systems. The balanced nature of this approach addresses both technical and social considerations and shows how each model performs under differing circumstances.

Each pricing model operates based on specific mechanisms and underlying assumptions. To summarize these details concisely, in [Table II] provides an overview of the pricing structures and key assumptions for each model.

To test different pricing models under the condition of a constant system, a set of parameters and assumptions must be established, allowing legitimate comparisons to be made across pricing models for this project. While developing our simulations, all of them subjected the following set of parameters to allow for constant parameters. The system assumes an average daily consumption of 20 kWh and a peak demand of 4 kW, so one can expect equalized energy use across scenarios.

Table II. PRICING MODEL PARAMETERS

Pricing Model	Pricing Structure	Key Assumptions
<b>Flat-Rate</b>	\$0.12 per kWh (constant rate for all hours)	<ul style="list-style-type: none"> <li>● No price variation</li> <li>● Consumption is only based on usage.</li> </ul>
<b>Block Tariff</b>	First 100 kWh: \$0.10/kWh Next 100 kWh: \$0.15/kWh Above 200 kWh: \$0.20/kWh	<ul style="list-style-type: none"> <li>● Tiered pricing encourages reduced consumption to remain in lower tiers.</li> </ul>
<b>TOU</b>	Off-Peak (10 PM–6 AM): \$0.08/kWh Peak (6–10 AM and 5–9 PM): \$0.20/kWh Shoulder: \$0.12/kWh	<ul style="list-style-type: none"> <li>● Incentivizes load shifting from peak to off-peak periods.</li> </ul>
<b>RTP</b>	Dynamic pricing between \$0.06 and \$0.25 per kWh, updated every 15 minutes	<ul style="list-style-type: none"> <li>● Prices reflect real-time supply-demand conditions.</li> </ul>
<b>Seasonal</b>	Winter (Nov–Mar): \$0.10/kWh Summer (Jun–Sep): \$0.20/kWh Spring/Fall (Mar–May, Sep–Nov): \$0.12/kWh	<ul style="list-style-type: none"> <li>● Prices adjust based on seasonal demand fluctuations.</li> </ul>
<b>CPP</b>	Normal: \$0.12/kWh Critical Peak: \$0.50/kWh during grid stress events	<ul style="list-style-type: none"> <li>● High prices during critical periods encourage demand reduction.</li> </ul>

<b>RGDP</b>	Renewable-Abundant: \$0.05/kWh (when renewable supply >50%) Renewable-Scarce: \$0.15/kWh (when renewable supply <20%)	● Prices are linked to the availability of renewable energy.
-------------	--	--

A typical daily load profile was established by a bottom-up household profile algorithm [18], capturing critical behavioral features with peaks in the morning (7–9 AM) and evening (5–8 PM) and lower demands during overnight and midday periods. In addition, the energy conversion system was assumed to operate at a standard performance level of 90%.

In evaluation, each of the models was described on different metrics, including energy efficiency enhancement, peak load shaving, savings for users, consumer satisfaction, improved reliability for the grid, the ease of implementation environmental tending, and support incorporation of renewable sources such as reduction of GHG emissions. Now, this framework provides an accurate measurement for comparison among the models and provides a clear insight into their influencing factors on demand management and their contribution to overall system performance.

#### 4. Results

A comparison of the seven pricing models reveals distinct performance trends across several of the key metrics. One-year simulations indicate that Time-of-Use pricing scheme achieves substantial success by reducing load demand through the moving-off of consumptions from high-demand hours. This was accompanied by impressive energy efficiency gains and consumer cost savings, spurred on by off-peak consumption incentives. Similarly, the Critical Peak Pricing model performed well during grid-stressing events, dramatically reducing demand would decreases during critical periods. However, the price surges associated with this model were seen to potentially diminish consumer satisfaction.

The Real-Time Pricing and Renewable Generation-Based Dynamic Pricing models offer dynamic responsive pricing to match consumption with real-time grid conditions and renewable output, respectively. The models also had all the potential for optimizing load management and the environmental advantages; however, faced obstacles for their implementation that were severe since they involved advanced metering, communication infrastructure, and precise forecasting. Conversely, while the Flat-Rate and Block Tariff systems appeared simple and quite easy to implement, especially in places with a great shortcoming of metering facilities, they provided scant incentives to change or modify consumer behavior, resulting in only minor improvements in energy efficiency and peak load reductions. The Seasonal Pricing model performed well effusively in accommodating such infinite variability throughout the seasonal loads; very high rates in the peak season occasionally led to dissatisfaction among consumers.

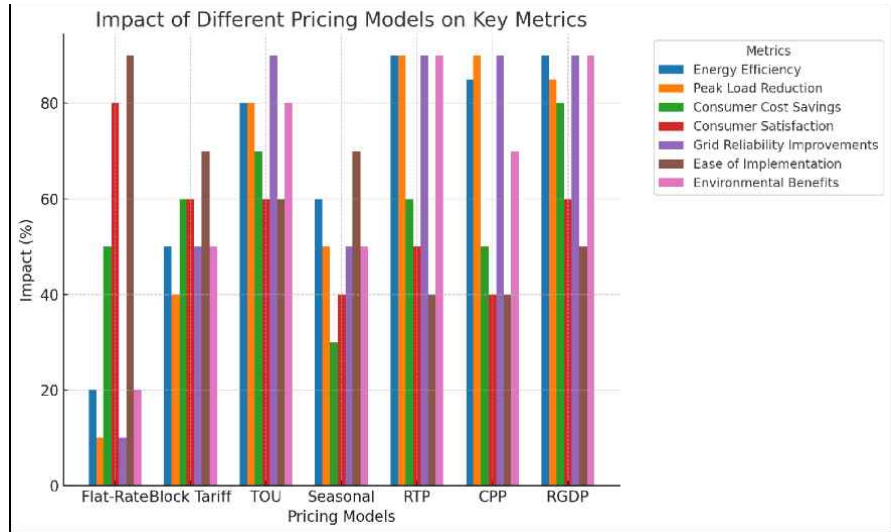


Figure 2. overall outcomes across the evaluation metrics

Table III. COMPARATIVE PERFORMANCE RATINGS FOR PRICING MODELS

Pricing Model	Energy Efficiency	Peak Load Reduction	Consumer Cost Savings	Consumer Satisfaction	Grid Reliability	Ease of Implementation	Environmental Benefits
Flat-Rate	Low	Low	Low	High	Low	High	Low
Block Tariff	Moderate	Moderate	Moderate	Moderate	Moderate	Moderate	Moderate
TOU	High	High	High	Moderate	High	Moderate	High
RTP	Moderate	High	Moderate	Low	Moderate	Low	Moderate
Seasonal	Moderate	Moderate	Moderate	Low	Moderate	Moderate	Moderate
CPP	Moderate	High	Moderate	Moderate	High	Moderate	Moderate
RGDP	Moderate	Moderate	Moderate	Moderate	Moderate	Low	High

The results show various price models' relative successes in enabling effective Demand-Side Management. In this regard, TOU and CPP are most notable for their impressive potential to decrease peak loads considerably and enhance grid reliability, thereby actively promoting energy efficiency during high-demand periods. TOU not only moves the consumption away from peak times but also promotes overall energy efficiency and savings, while CPP introduces high prices during times of grid stress, which is sometimes too abrupt for the consumer to swallow. RTP and RGDP strategies exhibit great promise for dynamic load management. However, significant challenges remain in implementing these, due to their dependence upon advanced metering and forecasting infrastructures. To say, simpler schemes such as flat rates and block tariffs, with their lower technological barrier and ease of implementation, afford lesser opportunity to change consumer behavior meaningfully. The findings clearly show that the balanced demand response strategy must take care of both technology and consumer behavior to justify efficiency, reliability, and satisfaction.

## 5. Conclusion

This study provides a thorough analysis of pricing-based demand response programs and their effect on Demand-Side Management (DSM) with the help of seven different pricing models: Flat-Rate, Block Tariff, Time-of-Use (TOU), Seasonal, Real-Time Pricing (RTP), Critical Peak Pricing (CPP), and Renewable Generation-Based Dynamic Pricing (RGDP).

The main findings of the simulation indicate that TOU and CPP models indeed appear to be more effective in terms of peak load reduction and grid reliability when given an environment with advanced metering infrastructure and consumer participation. RTP and RGDP show good potential for dynamic load management and a greater incorporation of renewable energy but rely heavily upon sophisticated forecasting and communication systems. Flat-Rate and Block Tariff systems can usually be implemented more easily in situations where infrastructure is limited, but they tend to bring about minimal shifts in consumer behavior.

Overall, the results suggest the need to have each DSM strategy tailored according to the chosen pricing model, in light of the technological capacity of the region, regulatory framework, and customer behavior. Among the challenges that have to be met in order to get the maximum payback from these demand response programs are those of infrastructure, consumer awareness, and regulatory support. Future work needs to consider the combination of multiple pricing strategies potentially improved not only with managerial decision-making of operators but also with sustainable planning through the use of artificial intelligence and machine learning techniques for dynamic energy consumption optimization. These innovations will be elemental in the shift toward energy systems that are efficient, reliable, sustainable, and environmentally friendly.

## Acknowledgment

This paper is part of a master's degree at Dept. of Electrical Engineering Department, Assiut University, Egypt.

## References

- [1] "A literature survey on energy-growth nexus," *Energy Policy*, p. 38, 2010.
- [2] M. Bakare, "A comprehensive overview on demand side energy management towards smart grids: challenges, solutions, and future direction," 2023.
- [3] "The impact of financial development on energy consumption in emerging economies," *Energy Policy*, 2010.
- [4] G. Shen, "Demand-side Management Under Real-time Greenhouse Gas Emission Factor for Electricity".
- [5] " Systematic Review of Demand-Side Management Strategies in Power Systems of Developed and Developing Countries," *energies*, p. 24, 2022.
- [6] "Demand Response in Electricity Markets: An Overview," *IEEE power engineering society general meeting*, p. 5, 2007.
- [7] "Frequency Support by Demand Response—Review and Analysis," *Energy Procedia*, p. 5, 2019.
- [8] "Demand Side Management: Demand Response, Intelligent Energy Systems, and Smart Loads," *IEEE trans*, p. 7, 2011.



- [9] P. Kuma, "Demand-Side Management: Energy Efficiency and Demand Response," 2018.
- [10] "A summary of demand response in electricity markets. Electr. Power Syst," CrossRef, p. 7, 2008.
- [11] "A review of demand side management business models in the electricity market," Energy Rev, p. 11, 2015.
- [12] J. Vardakas, "A Survey on Demand Response Programs in Smart Grids: Pricing Methods and Optimization Algorithms," 2015.
- [13] V. Cortez, "On the Impact of Flexibility on Demand-Side Management: Understanding the Need for Consumer-Oriented Demand Response Programs," 2024.
- [14] "Overview of demand-response services: a review," Energies,, p. 15, 2022.
- [15] "Using Time of Use (Tou) Tariffs In Industrial, Commercial and Residential Applications Effectively," researchgate, 2020.
- [16] "Challenges of Implementing Demand Side Management in Developing Countries," Journal of Power Technologies, p. 43, 2020.
- [17] "Impacts of multiple demand-side management strategies on microgrids planning: a literature survey," Clean Energy, p. 8, 2024.
- [18] U. Review, "Bottom-Up Medium-Term Hourly Resolution Household Electricity Load Profile Model," ELSEVIER, 2025.

# COPYRIGHT TRANSFER FORM

Title of the Journal: International Society for Information Technology and Application

Title of Work: Assessment of Pricing-Based Demand Response Programs and Their Impact on Demand-Side Management

Author(s) name(s): Mohamed A. Abdellah, Mohamed Abd Elazim Nayel, Islam M. Alkabbany, and Hany Selim

Corresponding Author's name, affiliation, Country and e-mail: Mohamed A. Abdellah, mohmedahmed01097@gmail.com

The copyright to the Contribution identified above is transferred to International Society for Information Technology and Application (hereinafter called ISIITA). The copyright transfer covers the sole right to print, publish, distribute and sell throughout the world the said Contribution and parts thereof, including all revisions or versions and future editions, in all forms and media of expression – such as in its electronic form (offline, online) – now known or developed in the future, as well as to translate, print, publish, distribute and sell the Contribution in any foreign languages and throughout the world.

I, the undersigned, declare that the article is original, and that I represent the authors of this article in the copyright release matters. If this work has been done as work-for-hire, I have obtained all necessary clearances to execute a copyright release.

I hereby irrevocably transfer exclusive copyright for this material to ISIITA. I give ISIITA permission or reproduce the work in any media format such as, but not limited to, print, digital, or electronic. I give ISIITA permission to distribute the materials without restriction to any institutions or individuals. I give ISIITA permission to submit the work for inclusion in article repositories as ISIITA sees fit.

I, the undersigned, declare that to the best of my knowledge, the article does not contain libelous or otherwise unlawful contents or invading the right of privacy or infringing on a proprietary right.

Following the copyright release, any circulated version of the article must bear the copyright notice and any header and footer information that ISIITA applies to the published article. ISIITA grants royalty-free permission to the authors to disseminate the work, under the above provisions, for any academic, commercial, or industrial use. ISIITA grants royalty-free permission to any individuals or institutions to make the article available electronically, online, or in print. ISIITA acknowledges that rights to any algorithm, process, procedure, apparatus, or articles of manufacture remain with the authors and their employers.

I, the undersigned, understand that ISIITA will not be liable, in contract, tort (including, without limitation, negligence), pre-contract or other representations (other than fraudulent misrepresentations) or otherwise in connection with the publication of my work.

Exception to the above is made for work-for-hire performed while employed by the government. In that case, copyright to the material remains with the said government. The rightful owners (authors and government entity) grant unlimited and unrestricted permission to ISIITA, ISIITA's contractors, and ISIITA's partners to further distribute the work. The Corresponding Author signs for and accepts responsibility for releasing this material on behalf of any and all Co-Authors.

Signature(s) of Author(s) : Mohamed A. Abdellah, Mohamed Abd Elazim Nayel, Islam M. Alkabbany, and Hany Selim Date : 12/02/2025

**AUTHOR/COMPANY RIGHTS:**

If you are employed and you prepared your paper as part of your job, the rights to your work rest initially with your employer. In that case, when you sign the copyright transfer form, we assume you are authorized to do so by your employer and that your employer has consented to all the terms and conditions of this form. If not, it should be signed by someone so authorized.

**PLEASE DIRECT ALL QUESTIONS ABOUT ISIITA COPYRIGHT POLICY OR THIS FORM TO:**

Conference secretarial/ International Symposium on Innovation in Information, E-mail:  
isiita.paper@gmail.com Office